


# KBT TYPE


## – Two Side Cut Flange Type –

KBT type is a metric dimension series generally used in Europe.

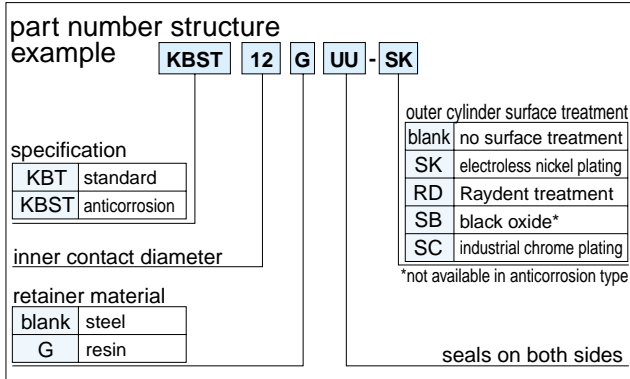

part number**				number of ball circuits	dr mm	tolerance μm	D		L ±0.3 mm
standard		anticorrosion					mm	tolerance μm	
steel retainer	resin retainer	stainless retainer	resin retainer						
<b>KBT 5UU</b>	<b>KBT 5GUU</b>	<b>KBST 5UU</b>	<b>KBST 5GUU</b>	4	5	+ 8 0	12	0	22
<b>KBT 8UU</b>	<b>KBT 8GUU</b>	<b>KBST 8UU</b>	<b>KBST 8GUU</b>	4	8		16	-13	25
<b>KBT12UU</b>	<b>KBT12GUU</b>	<b>KBST12UU</b>	<b>KBST12GUU</b>	4	12	+ 9 - 1	22	0	32
<b>KBT16UU</b>	<b>KBT16GUU</b>	<b>KBST16UU</b>	<b>KBST16GUU</b>	4	16		26	-16	36
<b>KBT20UU</b>	<b>KBT20GUU</b>	<b>KBST20UU</b>	<b>KBST20GUU</b>	5	20	+11 - 1	32	0 -19	45
<b>KBT25UU</b>	<b>KBT25GUU</b>	<b>KBST25UU</b>	<b>KBST25GUU</b>	6	25		40		58
<b>KBT30UU</b>	<b>KBT30GUU</b>	<b>KBST30UU</b>	<b>KBST30GUU</b>	6	30		47	68	

\*\* UU type is standard feature.

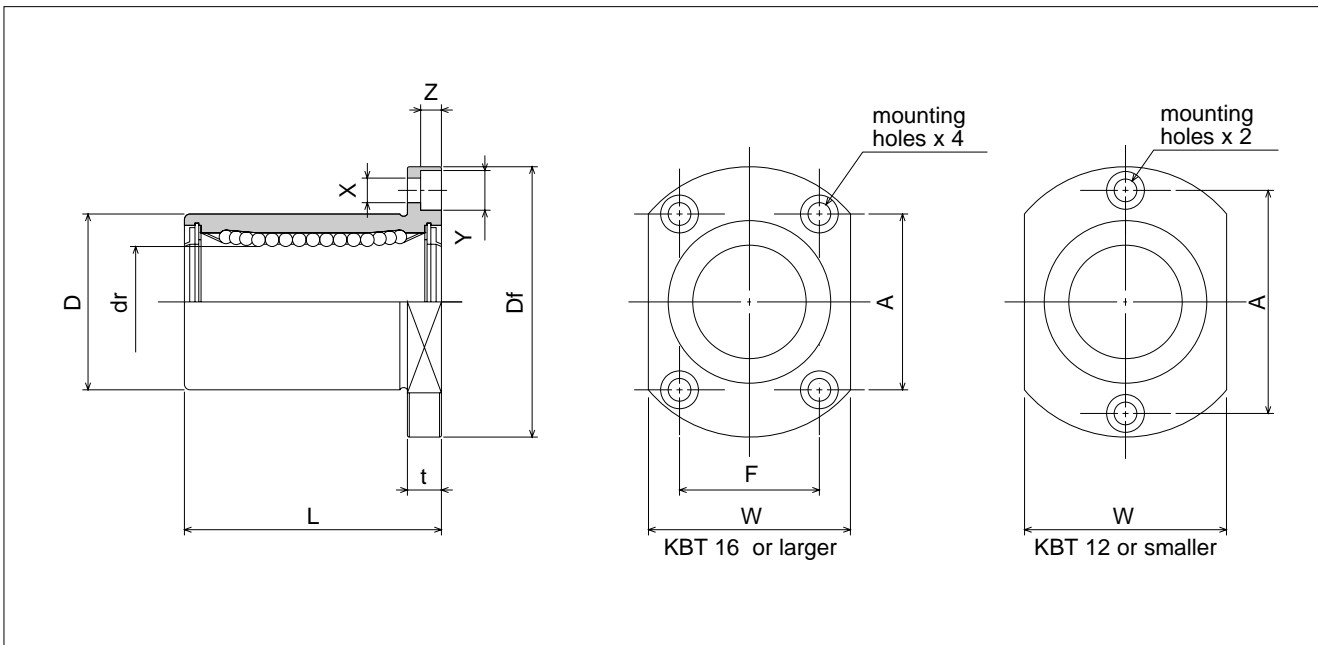


major dimensions						eccentricity	perpen- dicularity	basic load rating		mass	shaft diameter
flange								dynamic	static		
Df mm	W mm	t mm	A mm	F mm	X×Y×Z mm	μm	μm			C N	Co N
28	18	5	20	-	3.5×6×3.1	12	12	206	265	25	5
32	22	5	24	-	3.5×6×3.1			265	402	37	8
42	28	6	32	-	4.5×7.5×4.1			510	784	73	12
46	32	6	28	22	4.5×7.5×4.1			578	892	90	16
54	38	8	36	24	5.5×9×5.1	15	15	862	1,370	155	20
62	46	8	40	32	5.5×9×5.1			980	1,570	297	25
76	53	10	48	38	6.6×11×6.1			1,570	2,740	471	30

1N≒0.102kgf

# SWT TYPE

## – Two Side Cut Flange Type –


SWT type is an inch dimension series generally used in the U.S.

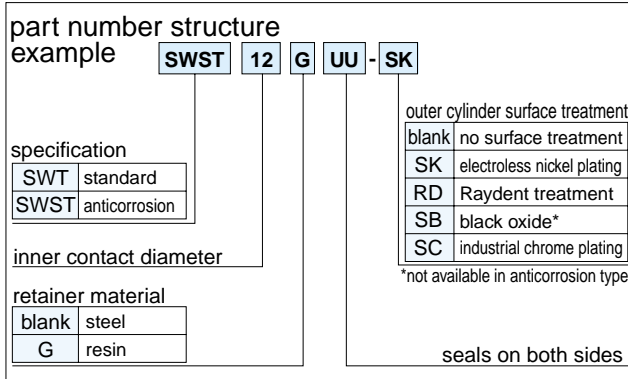

part number***				number of ball circuits	dr		D		L
standard		anticorrosion			inch	tolerance	inch	tolerance	±0.012 inch
steel retainer	resin retainer	stainless retainer	resin retainer			inch		inch	
<b>SWT 4UU</b>	<b>SWT 4GUU</b>	<b>SWST 4UU</b>	<b>SWST 4GUU</b>	3****	.2500	0 -.00040	.5000	0/- .00050	.7500
<b>SWT 6UU</b>	<b>SWT 6GUU</b>	<b>SWST 6UU</b>	<b>SWST 6GUU</b>	4	.3750		.6250	0	.8750
<b>SWT 8UU</b>	<b>SWT 8GUU</b>	<b>SWST 8UU</b>	<b>SWST 8GUU</b>	4	.5000		.8750	-.00065	1.2500
<b>SWT10UU</b>	<b>SWT10GUU</b>	<b>SWST10UU</b>	<b>SWST10GUU</b>	4	.6250		1.1250	0	1.5000
<b>SWT12UU</b>	<b>SWT12GUU</b>	<b>SWST12UU</b>	<b>SWST12GUU</b>	5	.7500		1.2500	0	1.6250
<b>SWT16UU</b>	<b>SWT16GUU</b>	<b>SWST16UU</b>	<b>SWST16GUU</b>	6	1.0000		1.5625	-.00075	2.2500
<b>SWT20UU</b>	<b>SWT20GUU</b>	<b>SWST20UU</b>	<b>SWST20GUU</b>	6	1.2500	0/- .00050	2.0000	0/- .00090	2.6250

\*\*\* UU type is standard feature.

\*\*\*\* 4 rows for resin retainer type.

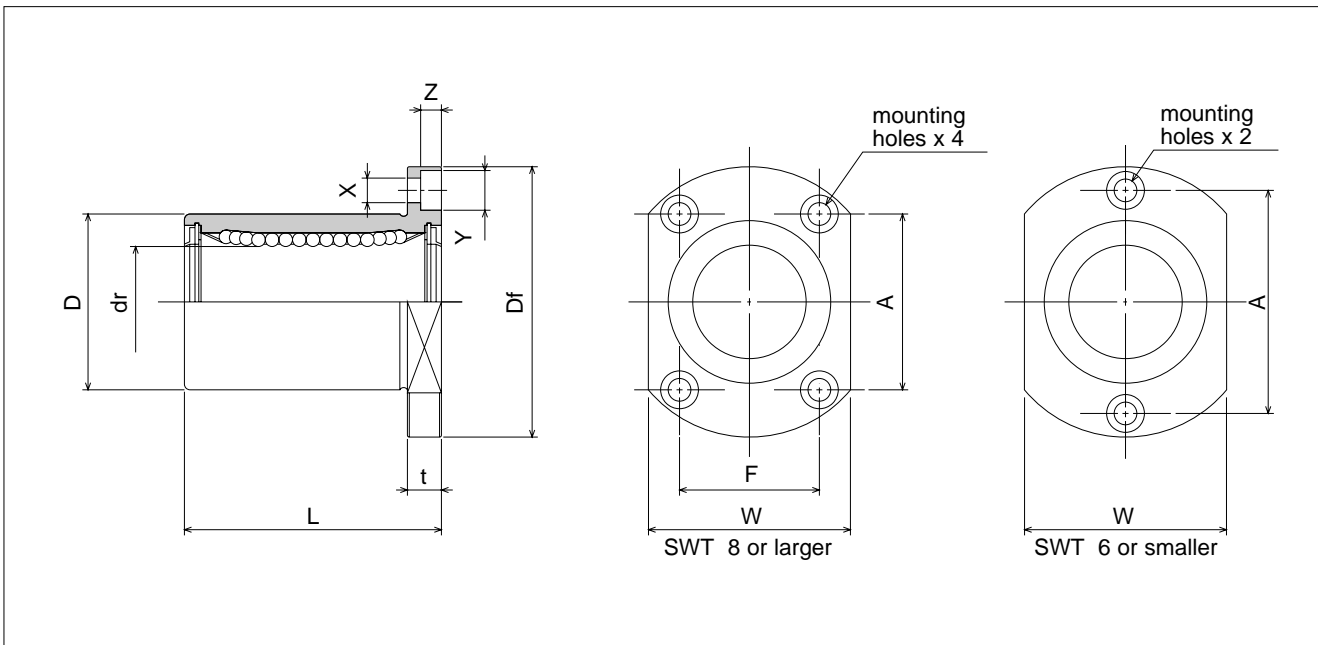

major dimensions						eccentricity	perpendicularity	basic load rating		mass	shaft diameter
flange								dynamic	static		
Df	W	t	A	F	X×Y×Z	inch	inch	C	Co	g	inch
inch	inch	inch	inch	inch	inch			N	N		
1.2500	.7500	.2190	.8750	-	.1560 × .2500 × .1410	.0005	.0005	206	265	28	1/4
1.5000	.8750	.2500	1.0625	-	.1875 × .2970 × .1720			225	314	44	3/8
1.7500	1.1250	.2500	1.1250	.6875	.1875 × .2970 × .1720			510	784	77	1/2
2.0000	1.3750	.2500	1.2500	.9375	.1875 × .2970 × .1720			774	1,180	125	5/8
2.1875	1.5000	.3125	1.3750	1.0000	.2187 × .3440 × .2030	.0006	.0006	862	1,370	162	3/4
2.5000	1.8750	.3125	1.5625	1.3125	.2187 × .3440 × .2030			980	1,570	293	1
3.1250	2.3750	.3750	1.8750	1.7500	.2812 × .4060 × .2656			.0008	.0008	1,570	2,740

1N ≅ 0.225 ℓ bs    1kg ≅ 2.205 ℓ bs