

支承滾輪型

Yoke type track rollers

分離式_無內輪

Separable-without inner ring



分離式_有內輪

Separable-with inner ring

分離式_有封片

Separable-with end washers

RSTO RSTO...X
 STO STO...X
 STO...ZZ STO...ZZX

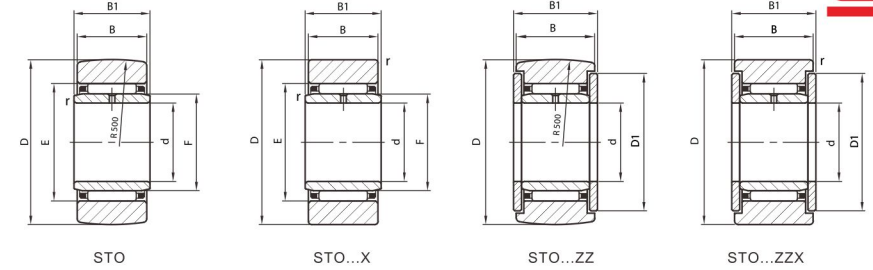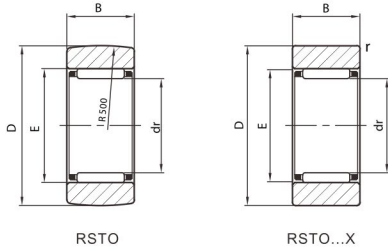

滾輪 外徑	軸承型號 Series	單位重 Weight	軸承型號 Series	單位重 Weight	尺寸 Dimensions mm		
					d	D	dr.F
D mm	無內輪 RSTO	g	有內輪 STO STO...ZZ	g	d	D	dr.F
19	RSTO 6		—		—	19	10
24	RSTO 8	23.5	STO 8	28	8	24	12
	RSTO 8X	23.5	STO 8X	28	8	24	12
			STO 8ZZ	39	8	24	—
			STO 8ZZX	39	8	24	—
30	RSTO 10	42	STO 10	49	10	30	14
	RSTO 10X	42	STO 10X	49	10	30	14
			STO 10ZZ	65	10	30	—
			STO 10ZZX	65	10	30	—
32	RSTO 12	49	STO 12	57	12	32	16
	RSTO 12X	49	STO 12X	57	12	32	16
			STO 12ZZ	75	12	32	—
			STO 12ZZX	75	12	32	—

尺寸 Dimensions mm					基本額定負荷 Basic load ratings		極限回轉速 Limited Speed
B1	B	E	r	D1	動 Dynamic C kgf	靜 Static Co kgf	油脂潤滑 Grease rpm (2)
10	9.8	13	0.3	—	440	520	15000
10	9.8	15	0.3	—	510	650	13000
10	9.8	15	0.3	—	510	650	13000
14	13.8	—	0.3	18.5	510	650	13000
14	13.8	—	0.3	18.5	510	650	13000
12	11.8	20	0.3	—	960	980	11000
12	11.8	20	0.3	—	960	980	11000
16	15.8	—	0.3	23.5	960	980	11000
16	15.8	—	0.3	23.5	960	980	11000
12	11.8	22	0.3	—	1030	1100	9500
12	11.8	22	0.3	—	1030	1100	9500
16	15.8	—	0.3	25.5	1030	1100	9500
16	15.8	—	0.3	25.5	1030	1100	9500

(1)當使用機油潤滑時，極限回轉速為表列數值的130%。
 With oil lubrication, 130% of the values given in the tables are permissible.



支承滾輪型

Yoke type track rollers

分離式_無內輪

Separable-without inner ring



分離式_有內輪

Separable-with inner ring

分離式_有封片

Separable-with end washers

RSTO RSTO...X
STO STO...X
STO...ZZ STO...ZZX

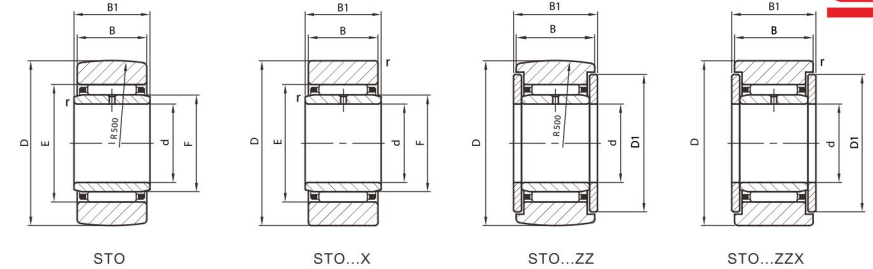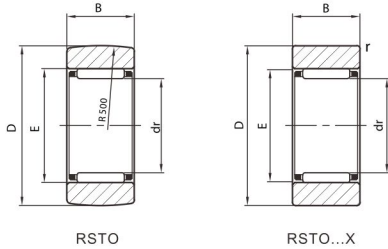

滾輪 外徑	軸承型號 Series	單位重 Weight	軸承型號 Series	單位重 Weight	尺寸 Dimensions mm		
					d	D	dr.F
D mm	無內輪 RSTO	g	有內輪 STO STO...ZZ	g	d	D	dr.F
35	RSTO 15	50	STO 15	63	15	35	20
	RSTO 15X	50	STO 15X	63	15	35	20
			STO 15ZZ	83	15	35	—
			STO 15ZZX	83	15	35	—
40	RSTO 17	88	STO 17	107	17	40	22
	RSTO 17X	88	STO 17X	107	17	40	22
			STO 17ZZ	135	17	40	—
			STO17ZZX	135	17	40	—
47	RSTO 20	130	STO 20	152	20	47	25
	RSTO 20X	130	STO 20X	152	20	47	25
			STO 20ZZ	195	20	47	—
			STO 20ZZX	195	20	47	—

尺寸 Dimensions mm					基本額定負荷 Basic load ratings		極限回轉速 Limited Speed
B1	B	E	r	D1	動 Dynamic C kgf	靜 Static Co kgf	油脂潤滑 Grease rpm (2)
12	11.8	26	0.3	—	1290	1490	7500
12	11.8	26	0.3	—	1290	1490	7500
16	15.8	—	0.3	29	1290	1490	7500
16	15.8	—	0.3	29	1290	1490	7500
16	15.8	29	0.3	—	2010	2500	7000
16	15.8	29	0.3	—	2010	2500	7000
20	19.8	—	0.3	32.5	2010	2500	7000
20	19.8	—	0.3	32.5	2010	2500	7000
16	15.8	32	0.3	—	2100	2710	6000
16	15.8	32	0.3	—	2100	2710	6000
20	19.8	—	0.3	38	2100	2710	6000
20	19.8	—	0.3	38	2100	2710	6000

(1)當使用機油潤滑時·極限回轉速為表列數值的130%。

With oil lubrication, 130% of the values given in the tables are permissible.



RSTO

STO

STO...ZZ

支承滾輪型

Yoke type track rollers

分離式_無內輪

Separable-without inner ring

分離式_有內輪

Separable-with inner ring


分離式_有封片

Separable-with end washers


RSTO RSTO...X

STO STO...X


STO...ZZ STO...ZZX




RSTO




RSTO...X




STO



STO...X



STO...ZZ



STO...ZZX

滾輪 外徑	軸承型號 Series	單位重 Weight	軸承型號 Series	單位重 Weight	尺寸 Dimensions mm		
					d	D	dr.F
D mm	無內輪 RSTO	g	有內輪 STO STO...ZZ	g	d	D	dr.F
52	RSTO 25	150	STO 25	177	25	52	30
	RSTO 25X	150	STO 25X	177	25	52	30
			STO 25ZZ	225	25	52	—
			STO 25ZZX	225	25	52	—
62	RSTO 30	255	STO 30	308	30	62	38
	RSTO30X	255	STO 30X	308	30	62	38
			STO 30ZZ	400	30	62	—
			STO 30ZZX	400	30	62	—
72	RSTO 35	375	STO 35	441	35	72	42
	RSTO 35X	375	STO 35X	441	35	72	42
			STO 35ZZ	550	35	72	—
			STO 35ZZX	550	35	72	—

(1)當使用機油潤滑時，極限回轉速為表列數值的130%。

With oil lubrication, 130% of the values given in the tables are permissible.

尺寸 Dimensions mm					基本額定負荷 Basic load ratings		極限回轉速 Limited Speed
B1	B	E	r	D1	動 Dynamic C kgf	靜 Static Co kgf	油脂潤滑 Grease rpm (2)
16	15.8	37	0.3	—	2330	3290	5000
16	15.8	37	0.3	—	2330	3290	5000
20	19.8	—	0.3	43	2330	3290	5000
20	19.8	—	0.3	43	2330	3290	5000
20	19.8	46	0.6	—	3450	5560	3900
20	19.8	46	0.6	—	3450	5560	3900
25	24.8	—	0.6	50.5	3450	5560	3900
25	24.8	—	0.6	50.5	3450	5560	3900
20	19.8	50	0.6	—	3600	5880	3600
20	19.8	50	0.6	—	3600	5880	3600
25	24.8	—	0.6	58	3600	5880	3600
25	24.8	—	0.6	58	3600	5880	3600



RSTO



STO



STO...ZZ

支承滾輪型

Yoke type track rollers

分離式_無內輪

Separable-without inner ring



分離式_有內輪

Separable-with inner ring

分離式_有封片

Separable-with end washers

RSTO RSTO...X
 STO STO...X
 STO...ZZ STO...ZZX

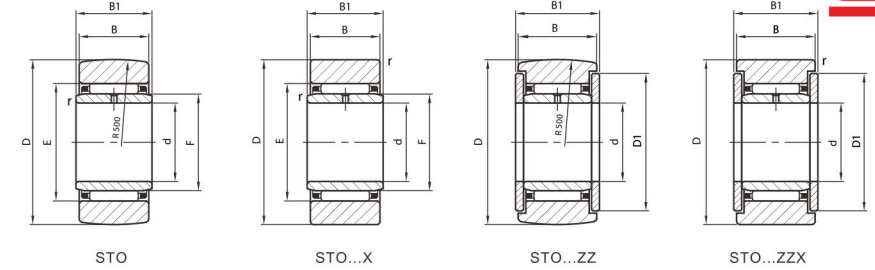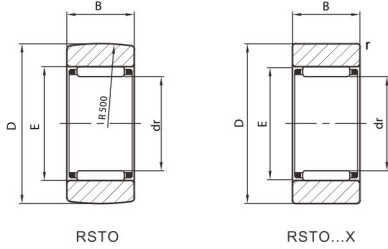

滾輪 外徑	軸承型號 Series	單位重 Weight	軸承型號 Series	單位重 Weight	尺寸 Dimensions mm		
					d	D	dr.F
D mm	無內輪 RSTO	g	有內輪 STO STO...ZZ	g	d	D	dr.F
80	RSTO 40	420	STO 40	530	40	80	50
	RSTO 40X	420	STO 40X	530	40	80	50
			STO 40ZZ	710	40	80	—
			STO 40ZZX	710	40	80	—
85	RSTO 45	453	STO 45	576	45	85	55
	RSTO 45X	453	STO 45X	576	45	85	55
			STO 45ZZ	760	45	85	—
			STO 45ZZX	760	45	85	—
90	RSTO 50	481	STO 50	617	50	90	60
	RSTO 50X	481	STO 50X	617	50	90	60
			STO 50ZZ	830	50	90	—
			STO 50ZZX	830	50	90	—

尺寸 Dimensions mm					基本額定負荷 Basic load ratings		極限回轉速 Limited Speed
B1	B	E	r min.	D1	動 Dynamic C kgf	靜 Static Co kgf	油脂潤滑 Grease rpm (2)
20	19.8	58	0.6	—	3860	6780	3000
20	19.8	58	0.6	—	3860	6780	3000
26	25.8	—	0.6	64	3860	6780	3000
26	25.8	—	0.6	64	3860	6780	3000
20	19.8	63	1	—	4080	7640	2700
20	19.8	63	1	—	4080	7640	2700
26	25.8	—	1	69	4080	7640	2700
26	25.8	—	1	69	4080	7640	2700
20	19.8	68	1	—	4410	8510	2500
20	19.8	68	1	—	4410	8510	2500
26	25.8	—	1	76	4410	8510	2500
26	25.8	—	1	76	4410	8510	2500



(1)當使用機油潤滑時·極限回轉速為表列數值的130%。
 With oil lubrication, 130% of the values given in the tables are permissible.